

The background of the entire page is a photograph of a bright, modern interior space. The ceiling features three large, white-framed Velux skylights that offer a view of a clear blue sky with scattered white clouds. The room's walls are a light, neutral color. In the lower portion of the image, a white dining table is visible, surrounded by wooden chairs. On the table, there are some decorative items including a black teapot, a green mug, and a small potted plant. In the background, a white shelf holds several framed pictures and a larger green plant stands near a glass door or window on the right side of the frame.

VELUX®

World-Leading Skylights


April 2025 Product Information & Price List
Skylights, Sun Tunnels, Roof Windows & Accessories

Contents

- 4 Pitched Roof Skylights
 - FS** Fixed Skylight
 - VS** Manual Skylight
 - VSE** Electric Skylight
 - VSS** Solar Skylight
- 8 Flat Roof Skylights
 - FCM** Fixed Skylight
 - VCM** Manual Skylight
 - VCS** Solar Skylight
- 12 Roof Windows
 - GGL** Centre-Pivot
 - GPL** Dual Action
- 14 Sun Tunnels
 - TWF** Flexible (Tiled Roof)
 - TWR** Rigid (Tiled Roof)
 - TCR** Rigid (Flat Roof)
- 16 Blinds
 - Honeycomb Blackout
 - Pleated Translucent
- 18 Flashing
- 20 Light Shafts
- 21 Accessories
 - Manual Controls
 - Electric Controls
 - VELUX ACTIVE
- 22 Price List and Sizes



Transforming Spaces

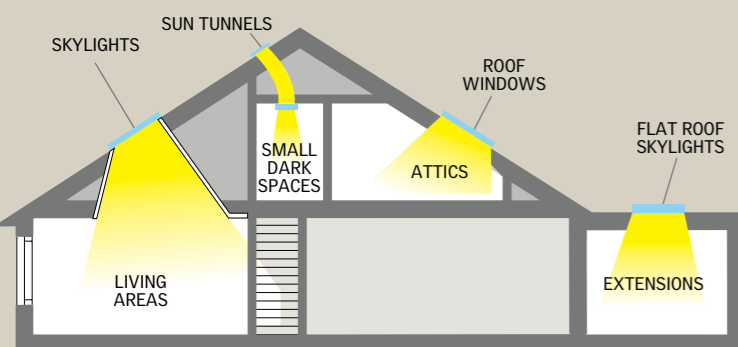







Pitched Roof Skylights



Designed to bring daylight and fresh air into any room, our pitched roof skylights are ideal for roofs over 15° and can be easily installed on tile and corrugated iron roofs using the VELUX EDW flashing kits, or custom flashed to suit a wide variety of metal roofs.

Crafted with a durable timber frame, they combine strength, style, and performance—helping to transform your home with the beauty of natural light.

*EDW flashing not suitable for wide span metal profiles such as Trimdek or Klip-lok

			
FIXED SKYLIGHT (FS)	MANUAL SKYLIGHT (VS)	ELECTRIC SKYLIGHT (VSE)	SOLAR SKYLIGHT (VSS)
NATURAL LIGHT: Contributes toward NCC (building code) regulations requiring natural light			
✓	✓	✓	✓
MADE FOR AUSTRALIA: Tested to guarantee reliability and to meet all relevant Australian standards			
✓	✓	✓	✓
DESIGN FLEXIBILITY: Without vertical windows, walls can be utilised for storage, decoration, or appliances, and have added privacy			
✓	✓	✓	✓
VENTILATION: Contributes toward NCC (building code) regulations requiring ventilation			
	✓	✓	✓
REDUCED A/C: Reduce the need to install A/C units by building homes that naturally ventilate rising heat			
	✓	✓	✓
REDUCE MOISTURE: Ventilate in kitchens to remove steam, or bathrooms for ventilation with privacy			
	✓	✓	✓
REMOTE OPERATED: Skylight is operated by RF wall-mounted keypad with a range of approx. 10m. Multiple skylights can be operated from 1 keypad			
		✓	✓
RAIN SENSOR: Skylight automatically closes when rain is detected for peace of mind (included)			
		✓	✓
USES STANDARD GPO: No hard wiring, plugs into standard GPO located in roof cavity (2m cable provided)			
		✓	
SOLAR POWERED: Solar panel charges a concealed battery, allowing operation day or night and doesn't require an electrician to install			
			✓
BATTERY POWER BANK: Concealed battery pack charges during the day, providing up to 100 uses when fully charged			
			✓
NO ELECTRICIAN REQUIRED: Low voltage cables can be safely handled by anyone (does not come with power plug)			
			✓

Blinds - details on page 16 & 17	FS	VS, VSE, VSS
Honeycomb Blackout	FSCD	FSCH
Pleated Translucent	FSLD	FSLH

Flashing Information (refer to page 18, 19)

Guarantee Information

10 Years - Skylight, glazing, frame, manual operators, flashing and coverings
3 Years - Blinds & electronic components

Package inclusions

VS - Insect screen, operator (manual), and operating eyelet (manual controls purchased separately)
VSE - Insect screen, operator (electric), wall mounted keypad, rain sensor
VSS - Insect screen, operator (solar), battery pack, wall mounted keypad, rain sensor, solar panel



BUILDING CODE REGULATIONS & TECHNICAL PERFORMANCE

U VALUE

SHGC (Solar Heat Gain Co-efficient)

UV PROTECTION

99% Reduction of harmful UV spectrum (UVA & UVB)

BUSHFIRE (AS3959)

BAL 40

*Custom-made flashing required. Skylight tested in closed position, metal flywire mesh protection required for opening apertures (consult local council). Roof pitch; 18°-75°

HAIL TEST

VELUX Simulated Tests ASTM E822-2009

*Hailstone test not performed on solar panel. Solar panel not attached during test.

Window Energy Rating Scheme (WERS)

Maximum 5-star summer rating

SKYLIGHT STANDARD (AS4285)

OVERHEAD GLAZING (AS1288)

Laminated glass (standard) must be used for skylights installed 3m or more above floor level.

WIND LOADS - NON-CYCLONIC REGIONS (AS4055)

BOUNDARY SEPARATION

Class 1 and Class 10 buildings: Within 900mm of a boundary wall

Class 2 to Class 9 buildings: 3 metres from a boundary wall

*CSIRO assessment report available on request. VELUX recommends consultation with relevant authority for possible Performance Solution before work commences. Skylight assessed in closed position.



HAIL
TESTED



BUSHFIRE
BAL40



WIND
LOADS



Blinds - details on page 16 & 17

Honeycomb Blackout

Pleated Translucent

FS

FSCD

FSLD

VS, VSE, VSS

FSCH

FSLH

ACCESSORIES (Sold Separately)

Manual Controls (VS only)

In-reach - Winder handle: ZZZ 201

Just out of reach - Short control rod (60cm): ZOZ 032

Out of reach - Extension Rod (up to 285cm): ZCT 300

(See page 21 for more information)

Electric Controls (VSE/VSS only)

Wall Mounted Keypad KLI 310 (Included with VSE/VSS)

VELUX ACTIVE KIX 300

Indoor climate control system


Smart Home Interface Unit: KLF 200

Building management system interface

Read more about our electric control solutions on page 21.

GLAZING

High Performance Double Glazing

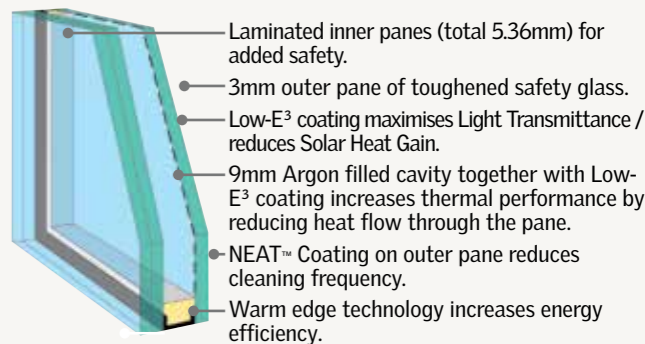




Flat Roof Skylights



VELUX flat roof skylights are designed to provide flat roofs with a versatile and high-performance skylight, enabling the transformation of home extensions and other spaces with flat roofs when used in combination with custom flashing.

The curb mounted construction makes them an ideal upgrade when replacing aging plastic dome skylights, as they fit onto the same flashing base while providing hail resistance and the superior insulation of double glazing.



Fixed Skylight (FCM)	Manual Skylight (VCM)	Solar Skylight (VCS)
NATURAL LIGHT: Contributes toward NCC (building code) regulations requiring natural light		
✓	✓	✓
DESIGN FLEXIBILITY: Without vertical windows, walls can be utilised for storage, decoration, or appliances, and have added privacy		
✓	✓	✓
SKYLIGHT REPLACEMENT: Perfect double glazed product to replace old plastic dome skylights.		
✓	✓	✓
VENTILATION: Contributes toward NCC (building code) regulations requiring ventilation		
	✓	✓
REDUCED A/C: Reduce the need to install A/C units by building homes that naturally ventilate rising heat		
	✓	✓
REDUCE MOISTURE: Ventilate in kitchens to remove steam, or bathrooms for ventilation with privacy		
	✓	✓
REMOTE OPERATED: Skylight is operated by RF wall-mounted keypad with a range of approx. 10m.		
		✓
RAIN SENSOR: Skylight automatically closes when rain is detected by the externally mounted rain sensor (included)		
		✓
BATTERY POWER BANK: Concealed battery pack charges during the day, providing up to 100 uses when fully charged		
		✓
SOLAR POWERED: Solar panel charges a concealed battery, allowing operation day or night and doesn't require an electrician to install		
		✓
NO ELECTRICIAN REQUIRED: Low voltage cables can be safely handled by anyone		
		✓

Blinds - details on page 16 & 17	FCM	VCM, VCS
Honeycomb Blackout	FSCC + ZZZ 199 Tray*	FSCC

*Requires ZZZ 199 tray

Flashing Information (refer to page 18, 19)

Guarantee Information

10 Years - Skylight, glazing, frame, manual operators, coverings
3 Years - Blinds & electronic components

Package inclusions

VCM - Insect screen, operator (manual), and operating eyelet (manual controls purchased separately)
VCS - Insect screen, operator (solar), battery pack, wall mounted keypad, rain sensor, solar panel



BUILDING CODE REGULATIONS/TECHNICAL PERFORMANCE

U VALUE

SHGC (SOLAR HEAT GAIN CO-EFFICIENT)

UV PROTECTION

99% Reduction of harmful UV spectrum (UVA & UVB)

BUSHFIRE (AS3959)

BAL 40

*Custom-made flashing required. Skylight tested in closed position, metal flywire mesh protection required for opening apertures (consult local council). Roof pitch; 0-60°.

HAIL TEST

VELUX Simulated Tests ASTM E822-2009

*Hailstone test not performed on solar panel. Solar panel not attached during test.

Window Energy Rating Scheme (WERS)

Maximum 5-star summer rating

SKYLIGHT STANDARD (AS4285)

*Cyclone test not performed with screws provided, installation requires #8 roofing screws.

OVERHEAD GLAZING (AS1288)

WIND LOADS - NON-CYCLONIC REGIONS (AS4055)

NT DTCM PRESSURE RATINGS

*Skylight must be installed in accordance with the engineering drawings, contact VELUX for more information.

BOUNDARY SEPARATION

Class 1 and Class 10 buildings: Within 900mm of a boundary wall

Class 2 to Class 9 buildings: 3 metres from a boundary wall

*CSIRO assessment report available on request. VELUX recommends consultation with relevant authority for possible Performance Solution before work commences. Skylight assessed in closed position



HAIL
TESTED



BUSHFIRE
BAL40



WIND
LOADS



Blinds - details on page 16 & 17

Honeycomb Blackout

*Requires ZZZ 199 tray

ACCESSORIES (Sold Separately)

Manual Controls (VCM only)

In-reach - Winder handle: ZZZ 212

Just out of reach - Short control rod (60cm): ZOZ 032

Out of reach - Extension rod (up to 285cm): ZCT 300

(See page 21 for more information)

Electric Controls (VCS only)

Wall Mounted Keypad KLI 310 (Included with VCS)

VELUX ACTIVE KIX 300

Indoor climate control system

Smart Home Interface Unit: KLF 200

Building management system interface

Read more about our manual and electric control solutions on page 21.



FCM

VCM

VCS

Skylight: 2.9
Glass: 1.93

Skylight: 2.9
Glass: 1.93

Skylight: 2.9
Glass: 1.93

Skylight: 0.28
Glass: 0.28

Skylight: 0.24
Glass: 0.28

Skylight: 0.24
Glass: 0.28



WIND
LOADS



FCM


VCM, VCS

FSCC + ZZZ 199
Tray*

FSCC

GLAZING

High Performance Double Glazing
Standard across entire skylight range

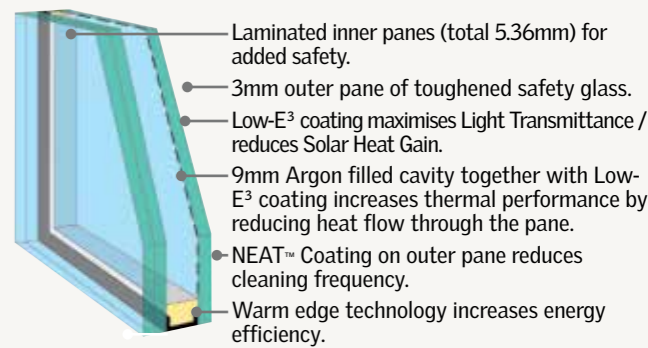

FCM 4646 & FCM 4672 outer pane is 3.9mm.



Roof Windows



Specifically designed for use in attic spaces, our roof windows turn underutilized areas into an extra bedroom, retreat or home office. The opening mechanisms have been built to allow quick and easy use within reach, adding both natural light and ventilation to otherwise dark spaces. Roof windows help you maximize your home’s potential, allowing your attic to become a functional extension of your living space.



GGL	GPL
NATURAL LIGHT: Contributes toward NCC (building code) regulations requiring natural light	
✓	✓
CLEAN FROM INSIDE: Can be rotated 180° and locked in place for cleaning the outer pane from inside.	
✓	✓
VENTILATION: Contributes toward NCC (building code) regulations requiring ventilation	
✓	✓
DUAL OPENING: The GPL can be opened both in center pivot motion and in top hung awning style.	
	✓
USABLE ATTIC SPACE: Being top hung, the sash opens outwards, providing more functional attic space	
	✓
OPTIONAL INSECT SCREEN: Insect screens are available for purchase for the GPL, keeping out flies and mosquitoes	
	✓

BUILDING CODE REGULATIONS/TECHNICAL PERFORMANCE	GGL	GPL
CODEMARK	✓	✓
U VALUE	Roof Window: 1.3 Glass: 1.0	
SHGC (SOLAR HEAT GAIN CO-EFFICIENT)	Roof Window: 0.30 Glass: 0.30	
UV PROTECTION 99% Reduction of harmful UV spectrum (UVA & UVB)	✓	✓
SKYLIGHT STANDARD (AS4285) *Except cyclonic wind pressure (GPL only)	✓	✓
OVERHEAD GLAZING (AS1288)	✓	✓
BOUNDARY SEPARATION Class 1 and Class 10 buildings: Within 900mm of a boundary wall Class 2 to Class 9 buildings: 3 metres from a boundary wall *CSIRO assessment report available on request. VELUX recommends consultation with relevant authority for possible Performance Solution before work commences. Skylight assessed in closed position	✓	✓



HAIL
TESTED



BUSHFIRE
BAL40



WIND
LOADS



CODEMARK
Australia
30089

Blinds - details on page 16 & 17	GGL	GPL
Manual Honeycomb Blackout	FHC	FHC
Insect Screen *ZIL Insect Screen is fitted to ceiling to cover plaster reveal. Suitable for within-reach applications only. NB: side channel length to be cut to size.	ZIL	ZIL

Flashing Information (refer to page 18, 19)

Guarantee Information

10 Years - Skylight, glazing, frame, manual operators, flashing and coverings
3 Years - Blinds



Sun Tunnels

When a traditional skylight isn't an option, sun tunnels offer the perfect alternative. Designed for tight spaces like walk-in robes, pantries, and powder rooms, they provide natural light to spaces where a traditional skylight wouldn't fit or when the roof cavity has obstructions. With minimal structural changes required, they are a quick and cost-effective way to brighten dark areas when you don't want to rely on artificial lighting.




SUITABLE FOR ROOFING TYPE			
PRODUCT	TWF	TWR	TCR- NEW
Suitable for roof material	Tiled Roof	Tiled Roof	Metal Roof
Suitable for roof pitches	15-60°	15-60°	0-60°
Tunnel diameter - 350mm	✓	✓	✓
Highly reflective shaft provides up to 3x as much light compared to TWF		✓	✓
Flexible tunnel allows installation even when obstructions in the roof cavity exist	✓		



CEILING DIFFUSER
EASY TO CLEAN
Threaded diffuser screws on and off allowing for easy removal for cleaning.
EDGE GLOW
A clear ring on the diffuser's circumference throws light further.

BUILDING CODE REGULATIONS/TECHNICAL PERFORMANCE

	TWF	TWR	TCR
CODEMARK	Yes	Yes	TBC
U VALUE	2.4	2.4	N/A
SHGC	0.5	0.61	N/A
BUSHFIRE (AS3959)	N/A	BAL 29 Roof pitch; 18°-60°	N/A
SKYLIGHT STANDARD (AS4285)	Yes *Except Cyclonic Wind Pressure	Yes *Except Cyclonic Wind Pressure	YES



Flashing Information (refer to page 18, 19)

TCR requires custom flashing.

Guarantee Information

7 Years

Package inclusions

TWF - Integrated flashing, 2200mm flexible tunnel, ceiling diffuser

TWR - Integrated flashing, 1650mm rigid tunnel including 2x 45° 'elbows', ceiling diffuser

TCR - 1150mm rigid tunnel including 2x 45° 'elbows', ceiling diffuser



Solar Skylight Blinds & Manual Roof Window Blinds


No window is complete without a blind and the same is true of skylights. VELUX blinds are tailored to perfectly fit VELUX skylights, giving you control at your fingertips. Whether you’re looking for a solution to soften natural light or provide total blackout, our range of blinds provides the ideal solution. Choose from our Honeycomb or Pleated Translucent blinds to complete your skylight installation.

Honeycomb Blackout - Ultimate Light Control & Insulation

For those who want superior thermal comfort and light blocking.

- Double-layered fabric for superior insulation – Keeps your home cooler in summer and warmer in winter.
- Room darkening effect – Ideal for bedrooms and media rooms.
- Modern, sleek design – Neatly retracts for a clean look when not in use.

Best for: Bedrooms, Home Offices, Media Rooms

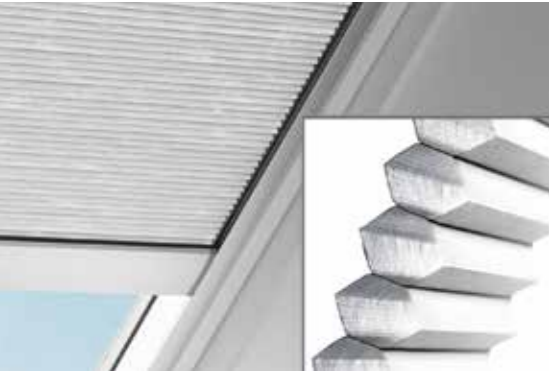

Pleated Translucent – Soft Light & Privacy




For those who love diffused or softer natural light.

- Gently diffuses daylight – Reduces glare while maintaining a bright, airy feel.
- Flexible light control – Adjustable to any position on the skylight.
- Elegant fabric texture – Adds softness and warmth to any room.

Best for: Living Rooms, Kitchens & Bathrooms



Blind	Light Reduction	Heat Reduction
Honeycomb Blackout	98%	70%
Pleated Translucent	40%	27%

BLIND OPTIONS (in stock)		FS	VS, VSE, VSS	FCM	VCM, VCS	GGL, GPL
Manual Honeycomb Blackout 1045						FHC
Solar Honeycomb Blackout 1045		FSCD	FSCH	FSCC + ZZZ 199 Tray*	FSCC	
Solar Pleated Translucent 1016		FSLD	FSLH			

Special Order Skylight and Roof Window Blind Options

*Requires ZZZ 199 tray to install blind
Additional colours available upon request. Our special orders are shipped from Europe. Contact VELUX for more information.

Room-Darkening, Double Pleated

 1155 Beige	 1163 Grey	 1164 Grey Melange	 1171 Dark Sand	 1172 Light Grey
 1047 Charcoal	 1049 Golden Beige	 1156 Blue	 1165 Light Brown	 1173 Petrol
 1168 Dusty Green	 1169 Light Blue	 1170 Dark Taupe	 1166 Ivory	 1167 Orange

Light Filtering, Single-Pleated

 1256 Classic White	 1259 Classic Sand	 1275 Natural	 1282 Dark Grey	 1286 Jeans Blue
 1274 Charcoal	 1276 Dusty Brown	 1277 Dusty Sand	 1278 Beige	 1280 Forest Green
 1281 Mint Green	 1283 Light Beige	 1284 Grey	 1285 Soft Blue	 1279 Red Wine



Flashing

VELUX Combination Flashing for metal or tile roofing. e.g. corrugate, tile

VELUX Flashing EDW

VELUX offers a range of flashing kits designed to integrate your skylights perfectly into your roofing material, ensuring the skylight is completely weathertight no matter the weather conditions.


EDW Flashing is designed to direct water through the aluminium side channels and over the apron which is designed to be molded to the shape of your tiles for a secure fit.

EDW Flashing can also be used on metal roofs that have a profile height less than 30mm, such as corrugated iron, however, custom flashing is another method often used on metal roofs. VELUX offers a range of EDL flashing suitable for slate roofs.

VELUX skylights can be coupled together using 'combi' flashing in a variety of configurations that allows you to design inspiring skylight features in your home.

Contact VELUX for more information on combi flashing.

Side by Side

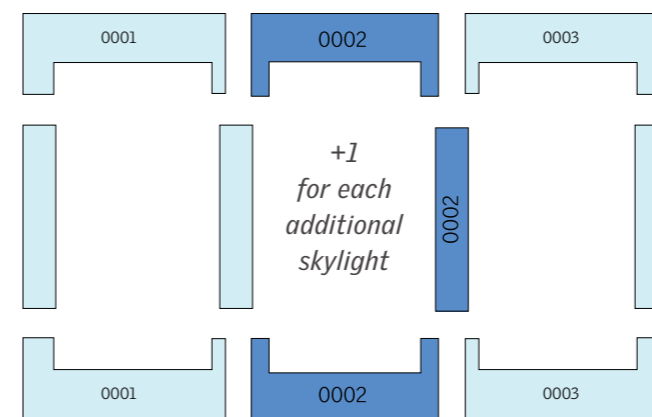

VELUX skylights can be coupled together using 'combi' flashing in a variety of configurations to add truly inspiring features to any room of the house.

When installing skylights with 'combi' flashing, skylights must be installed with a strict 100mm space between each skylight. See back page for information on 'combi' flashing product codes.

Contact VELUX when installing VSS above/below combination due to positioning of solar panel.

Custom flashing - All other solutions

- Required for flat roof skylight installations.
- Useful for situations where VELUX flashing isn't suitable. Such as bushfire areas, or when installing in a roof outside the installation pitch range (pitch adaptor), or when colour matching to roof is preferable.
- Not supplied by VELUX, contact VELUX for more information on custom flashing.



Light Shafts

Why Getting it Right Matters

The internal lightshaft is one of the most crucial elements for your skylight installer to get right. It plays a major role in how the skylight will look and function. A well-designed lightshaft not only enhances the look of your skylight but also maximises the natural light from your skylight. When done correctly, it can transform a space, making it feel brighter, more open, and visually stunning.



Splaying the Shaft

The angle and size of the lightshaft are key factors in determining how light enters the room. Splaying the shaft (angling the sides outward) creates a larger footprint on the ceiling. By creating a wider opening with the lightshaft you have a better view to the sky and maximise the amount of natural light entering the room.



Refining the Finish

In cathedral ceilings, where exposed trusses are present, or bulkheads between multiple skylights, wrapping the timber with gyprock can enhance architectural elements rather than detract from them. A detailed and well-finished bulkhead or truss wrap ensures the skylight feels like an intentional design feature rather than an afterthought.



Think Outside the Square




A lightshaft doesn't have to mirror the shape of the skylight itself. The internal shaft can be finished in a variety of creative shapes: circles, ovals, or even star-shaped designs. This flexibility allows homeowners and designers to turn the lightshaft into a unique architectural feature, showcasing the skylight in the best light.

Accessories

MANUAL ACCESSORIES

Winder Handles		Extension Rods	
VS: ZZZ 201	VCM: ZZZ 212	Short Control Rod: ZOZ 032	Telescopic Rod: ZCT 300
		60cm rod that attached to operating hook for use just out of reach.	Adjustable telescopic rod that can be extended between 145-285cm to operate VS/VCM skylights

ELECTRONIC ACCESSORIES

Interface Unit: KLF 200	Keypad: KLI 310	VELUX Touch: KLR 300
Interface unit for building management systems and 3rd party switches. KLF 200 can be set up to perform 5 independent groups of products.	Radio frequency wall mounted keypad used to operate VELUX products. Comes with a wall mounting kit. Battery powered (AAA).	All-in-one remote designed to control VELUX products such as skylights and blinds. Can be fitted to the wall with magnetic holder. Battery powered (AAA).
		

VELUX ACTIVE

With VELUX ACTIVE, sensors continuously monitor the temperature, humidity and CO2 levels in your home and open or close your VELUX electric and solar powered products to create a healthier indoor climate. VELUX ACTIVE kit includes 1x Gateway, 1x Climate Sensor, 1x Departure Switch.




Internet Gateway	Climate Sensor	Departure Switch
The Gateway enables control of your VELUX products on your smart phone and connects your VELUX products, indoor climate sensor and departure switch. Takes inputs from local weather data, your smart phone, and sensors to control your VELUX products. Operates on 2.4Ghz, select the 2.4Ghz channel in dual mode on your modem.	The indoor climate sensor continuously measures temperature, humidity and air quality (CO2 levels) in the room. 1 climate sensor is recommended per room with VELUX products; additional sensors can be purchased: KLA 300.	Tap the departure switch as you leave home if you want to turn the VELUX ACTIVE system off while you're out.

Price List

Skylights and roof windows (does not apply to FCM models) can only be installed as per orientation depicted below.

Pitched Roof Skylights

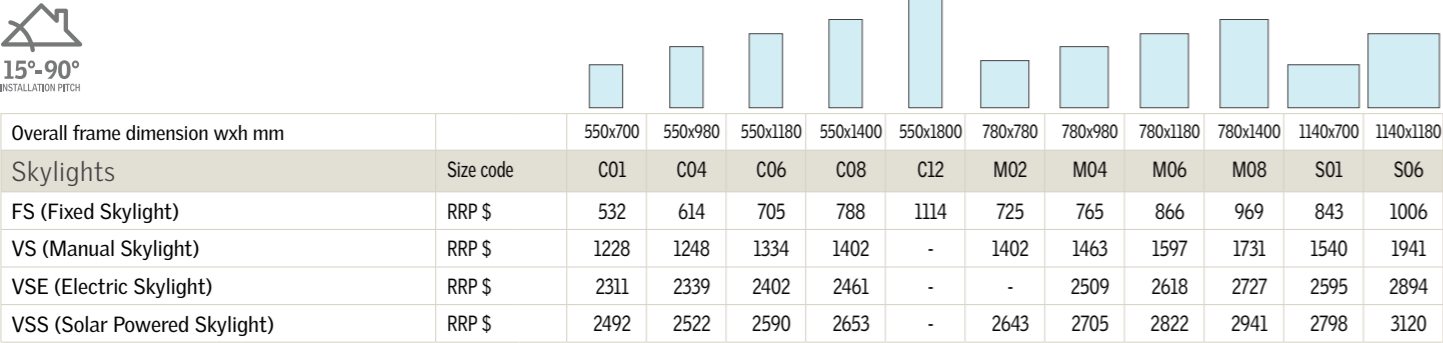


Blinds	Size code	C01	C04	C06	C08	C12	M02	M04	M06	M08	S01	S06
FSCD (Solar Honeycomb FS)	RRP \$	614	614	614	614	768	628	628	628	628	641	641
FSLD (Solar Pleated FS)	RRP \$	614	614	614	614	-	628	628	628	628	641	641
FSCH (Solar Honeycomb VS/VSE/VSS)	RRP \$	614	614	614	614	-	628	628	628	628	641	641
FSLH (Solar Pleated VS/VSE/VSS)	RRP \$	614	614	614	614	-	628	628	628	628	641	641

Flashing	Size code	C01	C04	C06	C08	C12	M02	M04	M06	M08	S01	S06
EDW (Tile/Corrugated Iron Roof)*	RRP \$	109	114	115	122	152	131	131	135	138	139	162

*EDW flashing not suitable for wide span metal profiles such as Trimdek or Klip-lok

Flat Roof Skylights

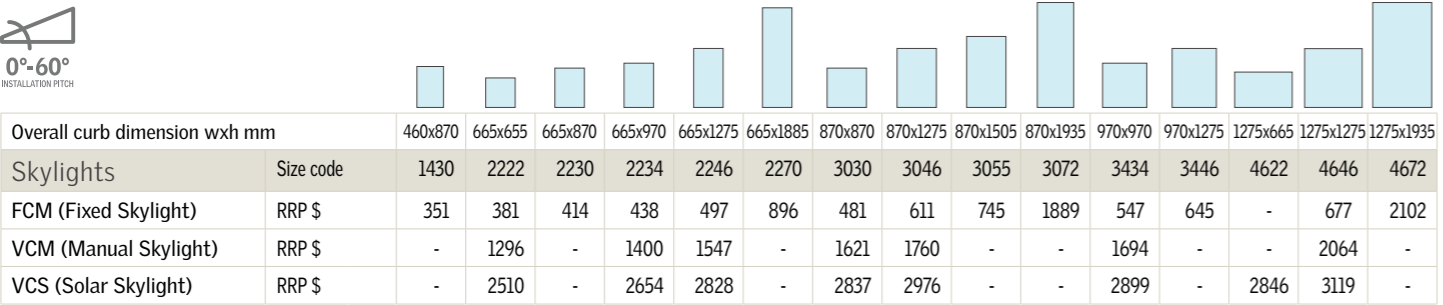

Blinds*	Size code	1430	2222	2230	2234	2246	2270	3030	3046	3055	3072	3434	3446	4622	4646	4672
FSCC (Solar Honeycomb)	RRP \$	-	615	615	615	615	706	627	627	-	-	641	641	680	680	-


FCM Blind Trays*	Size code	1430	2222	2230	2234	2246	2270	3030	3046	3055	3072	3434	3446	4622	4646	4672
ZZZ 199	RRP \$	-	95	95	95	95	122	98	98	-	-	101	101	105	105	-

*ZZZ 199 blind tray required to install FSCC blind to FCM skylight.

FCM 2270/3072/4672 not recommended for landscape orientation.
Refer to your VELUX distributor for shipping times.

Price list effective 1st April 2025. All prices are supply only and include GST. Priced subject to change without notice.
All prices are Recommended Retail Prices (RRP) only.

Roof Windows

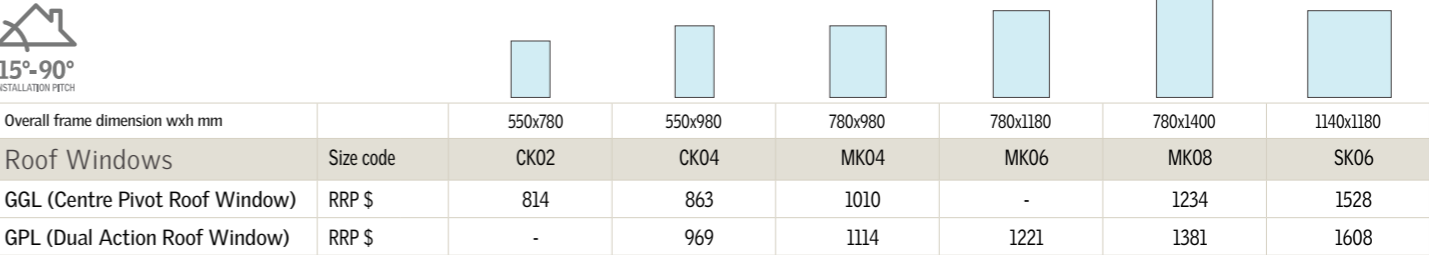

Blinds	Size code	CK02	CK04	MK04	MK06	MK08	SK06
FHC (Manual Honeycomb)	RRP \$	247	265	273	292	318	342
ZIL (Insect Screen for GPL* only)	RRP \$	-	339	419	419	419	465

*GPL suitable for 15°-55° installation pitch.

Flashing	Size code	CK02	CK04	MK04	MK06	MK08	SK06
EDW (Tile/Corrugated Iron Roof)*	RRP \$	109	126	145	149	152	170

*EDW flashing not suitable for wide span metal profiles such as Trimdek or Klip-lok

Sun Tunnels

Product		
TWR OK14 (Rigid Sun Tunnel, Pitched Roof).	RRP \$	747
TWF OK14 (Flexible Sun Tunnel, Pitched Roof).	RRP \$	461
TCR 014 (Rigid Sun Tunnel, Flat Roof).	RRP \$	795
ZTR OK14 (Rigid Extension 1240mm).	RRP \$	297

Accessories

Product	Description		
ZZZ 201	Winder handle (white to operate VS opening skylights within reach).	RRP \$	57
ZZZ 212	Winder handle (white to operate VCM low pitch opening skylights within reach).	RRP \$	57
ZZZ 203	Eyelet with Universal Joint.	RRP \$	69
ZOZ 032	Short rod control (60 cm) to operate within reach.	RRP \$	70
ZCT 300	Extendable rod control to operate manual opening skylights, 145cm - 285cm length.	RRP \$	96
KIX 300	VELUX ACTIVE starter kit - includes 1 x internet gateway, 1 x climate sensor, 1 x departure switch.	RRP \$	709
KLA 300	VELUX ACTIVE Indoor climate sensor. Additional climate sensors required to extend your VELUX ACTIVE system to additional rooms.	RRP \$	317
KLF 200	Interfact Unit, Connect to third party building managments systems, sensors and switches.	RRP \$	741
KLR 300	Touchscreen remote to operate multiple products.	RRP \$	285
KLI 310	Radio frequency wall mounted keypad used to operate VELUX products.	RRP \$	176

Price list effective 1st April 2025. All prices are supply only and include GST. Priced subject to change without notice.
All prices are Recommended Retail Prices (RRP) only.



VELUX®

VELUX Australia Pty Ltd
78 Henderson Road, Alexandria NSW 2015

1300 859 856
customer.service@velux.com.au
 [@veluxaustralia](https://www.instagram.com/veluxaustralia)

[velux.com.au](https://www.velux.com.au)

The utmost care has been taken to provide accurate information. However, VELUX shall not be held responsible for any consequences arising from any errors or omissions in the catalogue nor for any damage or accidental loss resulting from the use of the information herein. VELUX reserves the right to modify, through development improvements, the products displayed in this brochure without notification.
©2025 VELUX GROUP, VELUX®, VELUX logo, Made for Australia logo are registered trademarks. V-AUS 0325